

TECHNICAL ADVANTAGES

- Flanged connection according to ISO7005-2, BS EN 1092-2, DIN 2501
- Dismantling joints enables easy installation and dismantling of isolating valves, non return valves, flow metering equipment, pumps and etc
- It compensates for axial displacement of pipe during installation and dismantling
- Easy maintenance of valves, pumps, meters etc
- Simplifies pipe modifications, reduces downtime when changes are made
- Water, Sewage and neutral liquids
- HVAC Systems
- Water Purification and distribution lines
- Oil and gas applications
- Max 70°C

MATERIAL

- Body: GGG40/GGG50
- Tie Rod: Galvanized 8.8, SS304, SS316
- Gasket: EPDM, NBR, SBR





COATING

- Carbon steel with zinc coating or epoxy coating bolts and nuts
- Epoxy Coated Body

VERSIONS

- Less rod options also Available (Please contact your sales engineer)



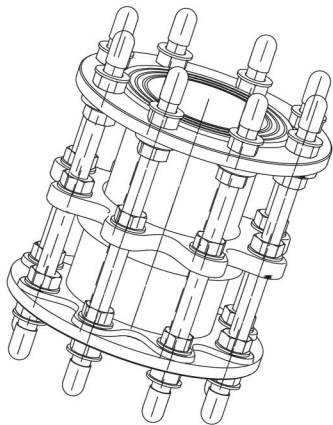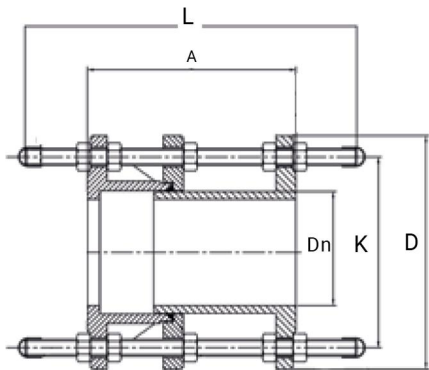

DN	PN10					PN16					PN25				
	A	D	K	Bolts	Weight	A	D	K	Bolts	Weight	A	D	K	Bolts	Weight
40	180	150	110	4x16	12,5	180	150	110	4x16	12,5	190	150	110	4x16	12,5
50	180	165	125	4x16	14,5	180	165	125	4x16	14,5	200	165	125	4x16	14,5
65	180	185	145	4x16	16,8	180	185	145	4x16	16,8	200	185	145	8x16	16,8
80	200	200	160	8x16	18	200	200	160	8x16	18	210	200	160	8x16	21
100	200	220	180	8x16	22	200	220	180	8x16	22	220	235	190	8x16	33
125	200	250	210	8x16	28	200	250	210	8x16	28	220	270	220	8x16	42
150	200	285	240	8x16	30	200	285	240	8x16	30	230	300	250	8x24	53
200	220	340	295	8x20	43	220	340	295	12x20	43	230	360	310	8x24	74
250	220	400	350	8x20	54	230	400	355	12x24	55	250	425	370	12x24	102
300	220	455	400	8x20	76	250	455	410	12x24	84	250	485	430	12x27	131
350	230	505	460	16x20	94	260	520	470	16x24	107	270	555	490	16x27	193
400	230	565	515	16x20	126	270	580	525	16x27	147	280	620	550	16x30	245
450	250	615	565	20x24	145	270	640	585	20x27	183	280	670	600	16x33	280
500	260	670	620	20x24	162	280	715	650	20x30	205	300	730	660	20x33	324
600	260	780	725	20x27	210	300	840	770	20x33	271	320	845	770	20x36	432
700	260	895	840	24x27	254	300	910	840	24x33	336	340	960	875	24x39	571
800	290	1015	950	24x30	338	320	1025	950	24x36	408	360	1085	990	24x45	801
900	290	1115	1050	28x30	438	320	1125	1050	28x36	522	380	1185	1090	28x45	886
1000	290	1230	1160	28x33	518	340	1255	1170	28x39	616	400	1320	1210	28x52	1270
1200	320	1455	1380	32x36	678	360	1485	1390	32x45	867	450	1530	1530	32x52	1871