




DOUBLE SOCKET / FLANGE 90° DUCK-FOOT BEND

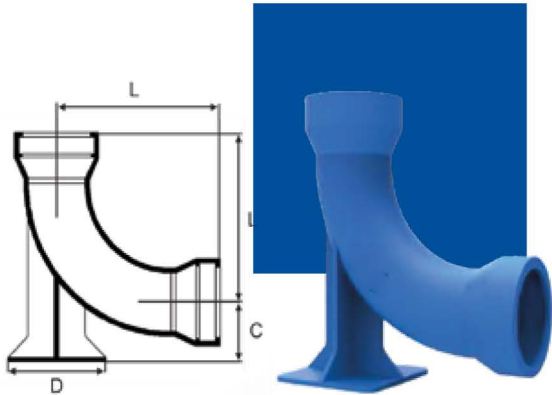

Double Socket 90° Duck-foot Bend				
DN	L	C	D	Mass (kg) T-type
100	120	125	200	14,8
150	170	160	250	28,5
200	220	190	300	44,5
250	270	225	350	68,5
300	320	255	400	100
350	370	290	450	133
400	420	320	500	180
450	470	355	550	230
500	520	385	600	294
600	620	450	700	442
700	720	515	800	618
800	820	580	900	832
900	920	645	1000	1113
1000	1020	710	1100	1435
1200	1220	840	1300	2153

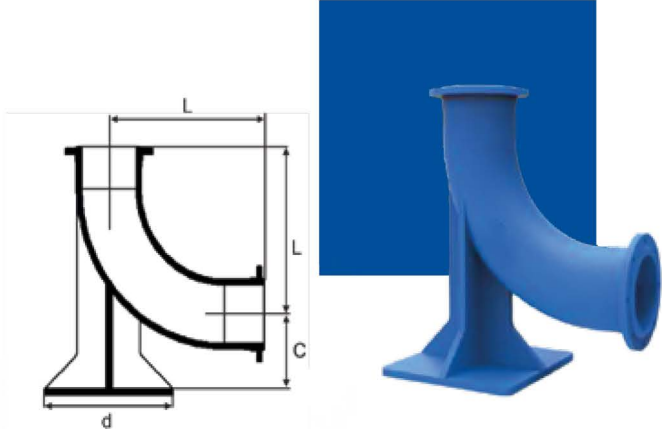


Double Flange 90° Duck-foot Bend						
DN	L	c	d	Mass (kg)		
				PN10	PN16	PN25
100	180	125	200	17,8	17,8	18,8
150	220	160	250	30	30	32
200	260	190	300	46,5	46	50,5
250	350	225	350	75	75	82
300	400	255	400	106	105	116
350	450	290	450	139	145	162
400	500	320	500	178	189	212
450	550	355	550	229	249	275
500	600	385	600	283	313	337
600	700	450	700	428	481	509
700	800	515	800	700	741	811
800	900	580	900	846	884	982
900	1000	645	1000	1118	1165	1286
1000	1100	710	1100	1698	1781	1937
1200	1300	840	1300	2599	2709	/



80mm Flange and Socket 90° Short Hydrant Duckfoot Bends, Class K12

DN	C	Mass (kg)
80	95	12,5
100	102	15,9
150	130	21,5



Double Flange 90° Hydrant Duckfoot Bends, Class K12

DN		B	C	D	Mass (kg)
Body	Branch				
80	80	165	110	180	14
100	80	180	125	200	17
150	80	220	160	200	28

